



PN25S SERİSİ EMNİYETLİ PNOMATİK OTOMATİK REKORLAR

PN25S Serisi Pnömatik Otomatik Rekorlar basınç altında tek elle sökülüp takılabilme özelliğine sahiptir. PN25S serisinde yaylar krom nikteldir.

PN25S Serisi Pnömatik Otomatik Rekorlar, sağlam ve dayanıklı yapıları, yüksek hava akım kapasiteleri ve kullanım kolaylığı sayesinde tüm sanayide basınçlı hava hatlarında güvenle kullanılmaktadır. Emniyetli özelliği ise üzerindeki butona 1. basmada hava akışını keser 2. basmada ise gövdeye takılı ucun çıkarılmasına müsaade eder.



PN25SGT14MCN
1/4" BSPT 19W Emn. Erkek Gövde
1/4" BSPT 19W Safety Male Thread
Coupler

**PNÖMATİK
MANİFOLDLARDA
KULLANILAN
1/4" BSPT 19W
EMNİYET OTM.
REKOR/
1/4" BSPT 19W
PNEUMATIC SAFETY
COUPLER THAT
ESPECIALLY USED
WITH
PNEUMATIC
MANIFOLDS.**

Uyumluluk

Malzeme

Sızdırmazlık

Çalışma Sıcaklığı

Kaplama

Isıl İşlem

Yay

Takma Sistemi

Çıkarma Sistemi

Basınç Altında Takılabilme

Basınç Altında Çıkarılabilme

Özel Hallerde

Kullanım Alanları

Rectus 26 (Avrupa Standardı)

Otomat Çeliği

Nitril O-ring (NBR)

-30 °C ile +110 °C

Galvaniz (Chrome III pasivasyon)

Uçlarda

Krom Nikel

Uç ileri itilerek (Tek el)

Yüzük geri çekilerek (Tek el)

Yapılabilir

Yapılabilir

VİTON

Tüm endüstrilerde basınçlı hava hatları

PN25S SERIES PNEUMATIC SAFETY QUICK COUPLINGS

PN25S Series Pneumatic Quick Couplings have single hand operation feature which provides easy and quick connection and disconnection under pressure. For PN25S Series stainless steel springs are used.

PN25S Series Pneumatic Quick Couplings are widely used confidently for compressed air lines in all industries due to their strong and durable structure, high flow capacity and user-friendly usage. At the first push on the button air flow will be stopped and the second push will allow you to pull the nipple over the coupler.



PN25SG14MCN
1/4" BSP Emn. Erkek Gövde
1/4" BSP Safety Male Thread
Coupler



PN25SG38MCN
3/8" BSP Emn. Erkek Gövde
3/8" BSP Safety Male Thread
Coupler



PN25SG12MCN
1/2" BSP Emn. Erkek Gövde
1/2" BSP Safety Male Thread
Coupler



PN25SG14FCN
1/4" BSP Emn. Dişi Gövde
1/4" BSP Safety Female Thread
Coupler



PN25SG38FCN
3/8" BSP Emn. Dişi Gövde
3/8" BSP Safety Female Thread
Coupler



PN25SG12FCN
1/2" BSP Emn. Dişi Gövde
1/2" BSP Safety Female Thread
Coupler

Interchangeability

Material

Sealing

Working Temperature

Plating

Heat Treatment

Spring

Connection System

Disconnection System

Connection Under Pressure

Disconnection Under Pressure

Upon Request

Applications

Rectus 26 (European Standart)

Carbon Steel

Nitrile O-ring (NBR)

-30 °C and +110 °C

Zinc Plating (Cr III Passivation)

Nipples

Stainless steel

Pushing the nipple (One-hand operation)

Pulling back the sleeve (One-hand operation)

Allowed

Allowed

VİTON

Compressed air lines in all industries



PN25S6HCN
6mm. Emn. Hortum Gövde
6mm. Safety Hose Coupler



PN25S8HCN
8mm. Emn. Hortum Gövde
8mm. Safety Hose Coupler




PN25S10HCN
10mm. Emn. Hortum Gövde
10mm. Safety Hose Coupler




PN25S13HCN
13mm. Emn. Hortum Gövde
13mm. Safety Hose Coupler



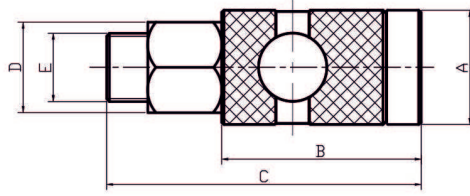


Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) (E)	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm			
			A	B	C	D
PN25SGT14MCN	1/4" BSPT 19W	0-80	28	48.50	80.50	AA 22
PN25SG14MCN	1/4" BSP	0-80	28	48.50	76.50	AA 22
PN25SG38MCN	3/8" BSP	0-80	28	48.50	76.50	AA 22
PN25SG12MCN	1/2" BSP	0-80	28	48.50	79.50	AA 22

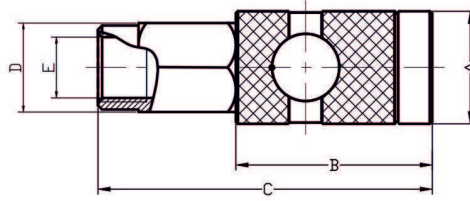

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) (E)	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm			
			A	B	C	D
PN25SG14FCN	1/4" BSP	0-80	28	48.50	82.50	AA22
PN25SG38FCN	3/8" BSP	0-80	28	48.50	82.50	AA22
PN25SG12FCN	1/2" BSP	0-80	28	48.50	82.50	AA24

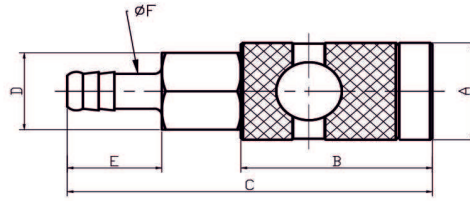

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) (E)	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm				
			A	B	C	D	E
PN25S6HCN	Ø 6	0-80	28	48.50	92.50	AA22	24
PN25S8HCN	Ø 8	0-80	28	48.50	92.50	AA22	24
PN25S10HCN	Ø 10	0-80	28	48.50	92.50	AA22	24
PN25S13HCN	Ø 13	0-80	28	48.50	92.50	AA22	24

Seri (Serie)	Basınç - Bar (Pressure - Bar)	Debi - Lt./Dk. (Flow Rate - Lt./Min.)
PN 25S Serisi / PN 25S Series	4 Bar	47,51
	6 Bar	66,51
	8 Bar	85,52
	10 Bar	104,52
	12 Bar	123,53
	15 Bar	152,03