



BV2SS SERİSİ HİDROLİK 2 YOLLU AISI 316-L PASLANMAZ KÜRESEL VANALAR

Komple olarak AISI 316-L paslanmaz çelikten imal edilen BV2SS Serisi Hidrolik 2 Yollu AISI 316-L Paslanmaz Küresel Vanalar, her türlü kimyasal ve korozyona karşı mükemmel dirence sahiptir. BV2SS Serisi vanalarda kare pim üzerindeki kilitleme pulu yardımıyla açık veya kapalı olarak kilitleme yapılabilir.

Gövde Malzemesi	AISI 316-L kalite paslanmaz çelik
Küre Malzemesi	AISI 316-L kalite paslanmaz çelik
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Küre Yataklaması	Delrin
Sızdırmazlık	Nitril O-Ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +225 °C
Özel Hallerde	VİTON (Teflon yataklama ile birlikte) EPDM (Buhar uygulamalarına özel)
Kullanım Alanı	Denizcilik, gıda, ilaç, medikal, kimya, sulama, kağıt, boya, tekstil, gaz, havacılık






BV2SS SERIES HYDRAULIC 2-WAY AISI 316-L STAINLESS STEEL BALL VALVES

BV2SS Series 2-Way AISI 316-L Stainless Steel Ball Valves are completely made of AISI 316-L stainless steel row material have an excellent resistance to all kind of chemical and corrosion. BV2SS Series Ball Valves can be locked in the open or closed position through locking washer on the circle pin.

Body Material	AISI 316-L stainless steel
Ball Material	AISI 316-L stainless steel
Thread Size	BSP (Upon Request: NPT, Metric)
Ball Seats	Delrin (POM)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +225 °C
Upon Request	VITON (With teflon seating) EPDM (For steam application)
Applications	Marine, food, pharmacy, medical, chemical, irrigation, paper, paint, textile, gas and aviation



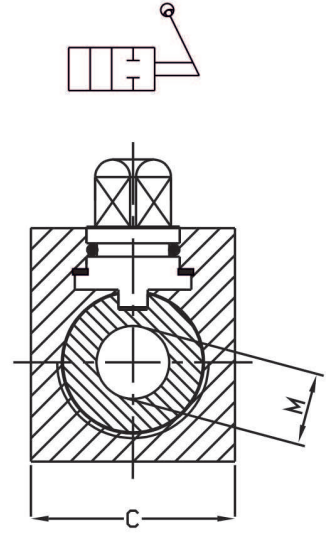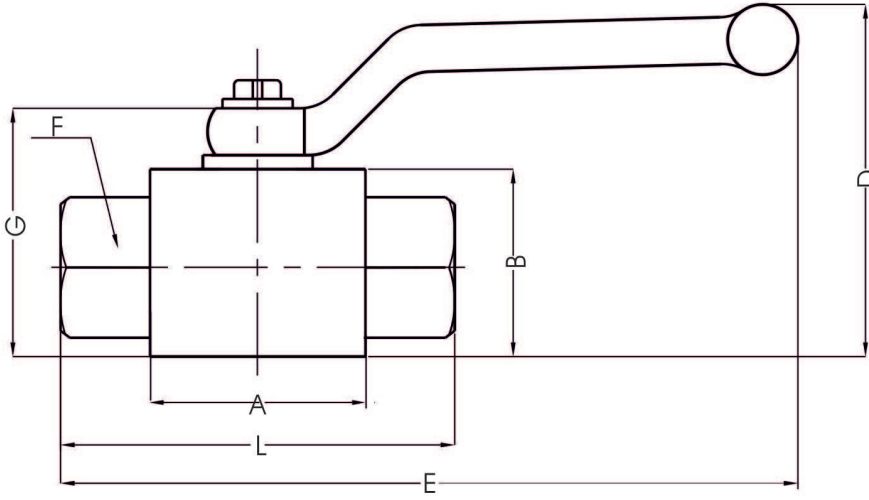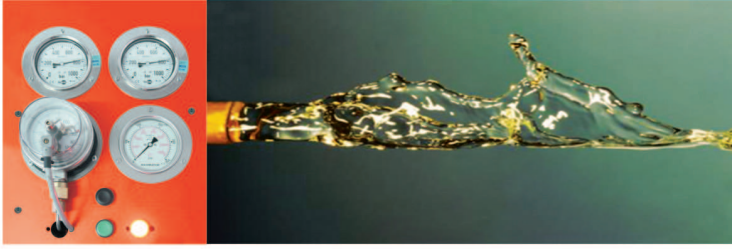

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size)	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm								
			M	A	B	C	D	E	F	G	L
BV2SSG14N	1/4" BSP	500	DN 10	45	35	30	75	150	24	48	75
BV2SSG38N	3/8" BSP	500	DN 10	45	35	30	75	150	24	48	75
BV2SSG12N	1/2" BSP	500	DN 13	50	40	35	80	150	30	53	84
BV2SSG34N	3/4" BSP	400	DN 20	60	55	45	118	240	38	73	96
BV2SSG1N	1" BSP	400	DN 25	70	60	55	120	250	46	78	118
BV2SSG114N	1 1/4" BSP	400	DN 25	70	60	55	120	260	50	78	133
BV2SSG112N	1 1/2" BSP	380	DN 25	70	60	55	120	260	55	78	140

Yüksek ısıya dayanıklı vitonlu ve teflonlu paslanmaz küresel vanalarımızda çalışma basınçları yukarıdaki değerlerden %35 düşüktür
Working pressures of stainless steel ball valves for high temperature with viton sealing and teflon are 35% lower than pressures above

